

■ 特性

- ◆ 外型尺寸: 25.4x25.4x11.7 (mm)
- ◆ 工作温度: -40°C~+85°C
- ◆ 金属外壳, 内部灌胶
- ◆ 4:1输入电压范围
- ◆ 输入欠压、输出过压、过流、短路保护
- ◆ 裸机满足CISPR22/EN55022 CLASS A
- ◆ 满足IEC60950/UL60950/EN60950


■ 型号选择表

型号	输入电压	输出		功率		
		电压V	电流A			
HDPM06-W24S03	9-36 VDC	3.3	1.5	6W		
HDPM06-W24S05		5	1.2			
HDPM06-W24S12		12	0.5			
HDPM06-W24S15		15	0.4			
HDPM06-W24S24		24	0.25			
HDPM06-W24D05		±5	±0.6			
HDPM06-W24D12		±12	±0.25			
HDPM06-W24D15		±15	±0.2			
HDPM06-W24D24		±24	±0.125			
HDPM06-W48S03		18-75 VDC	3.3		1.5	6W
HDPM06-W48S05	5		1.2			
HDPM06-W48S12	12		0.5			
HDPM06-W48S15	15		0.4			
HDPM06-W48S24	24		0.25			
HDPM06-W48D05	±5		±0.6			
HDPM06-W48D12	±12		±0.25			
HDPM06-W48D15	±15		±0.2			
HDPM10-W24S03	9-36 VDC		3.3	2.4	10W	
HDPM10-W24S05			5	2.0		
HDPM10-W24S09		9	1.11			
HDPM10-W24S12		12	0.83			
HDPM10-W24S15		15	0.67			
HDPM10-W24S24		24	0.42			
HDPM10-W24D05		±5	±1.0			
HDPM10-W24D09		±9	±0.56			
HDPM10-W24D12		±12	±0.42			
HDPM10-W24D15		±15	±0.33			
HDPM10-W24D24	±24	±0.21				
HDPM10-W48S03	18-75 VDC	3.3	2.4	10W		
HDPM10-W48S05		5	2.0			
HDPM10-W48S09		9	1.11			
HDPM10-W48S12		12	0.83			
HDPM10-W48S15		15	0.67			
HDPM10-W48S24		24	0.42			
HDPM10-W48D05		±5	±1.0			
HDPM10-W48D09		±9	±0.56			
HDPM10-W48D12		±12	±0.42			
HDPM10-W48D15		±15	±0.33			
HDPM10-W48D24	±24	±0.21				
HDPM15-W24S03	9-36 VDC	3.3	4.0	15W		
HDPM15-W24S05		5	3.0			
HDPM15-W24S12		12	1.25			
HDPM15-W24S15		15	1.0			
HDPM15-W24S24		24	0.63			
HDPM15-W24D05		±5	±1.5			
HDPM15-W24D12		±12	±0.63			
HDPM15-W24D15		±15	±0.5			
HDPM15-W24D24		±24	±0.32			
HDPM15-W48S03		18-75 VDC	3.3		4.0	15W
HDPM15-W48S05	5		3.0			
HDPM15-W48S12	12		1.25			
HDPM15-W48S15	15		1.0			
HDPM15-W48S24	24		0.63			
HDPM15-W48D05	±5		±1.5			
HDPM15-W48D12	±12		±0.63			
HDPM15-W48D15	±15		±0.5			
HDPM15-W48D24	±24		±0.32			

■ 型号选择表

型号	输入电压	输出		功率
		电压V	电流A	
HDPM20-W24S03	9-36 VDC	3.3	5.0	20W
HDPM20-W24S05		5	4.0	
HDPM20-W24S12		12	1.67	
HDPM20-W24S15		15	1.33	
HDPM20-W24S24		24	0.83	
HDPM20-W24D05		±5	±2.0	
HDPM20-W24D12		±12	±0.83	
HDPM20-W24D15		±15	±0.67	
HDPM20-W24D24		±24	±0.42	
HDPM20-W48S03		18-75 VDC	3.3	
HDPM20-W48S05	5		4.0	
HDPM20-W48S12	12		1.67	
HDPM20-W48S15	15		1.33	
HDPM20-W48S24	24		0.83	
HDPM20-W48D05	±5		±2.0	
HDPM20-W48D12	±12		±0.83	
HDPM20-W48D15	±15		±0.67	
HDPM20-W48D24	±24		±0.42	
HDPM06-W110S05	40-160 VDC		5	1.2
HDPM06-W110S12		12	0.5	
HDPM06-W110S15		15	0.4	
HDPM06-W110S24		24	0.25	
HDPM06-W110D05		±5		
HDPM06-W110D15		±15	±0.2	

■ 外型尺寸图 (单位mm)

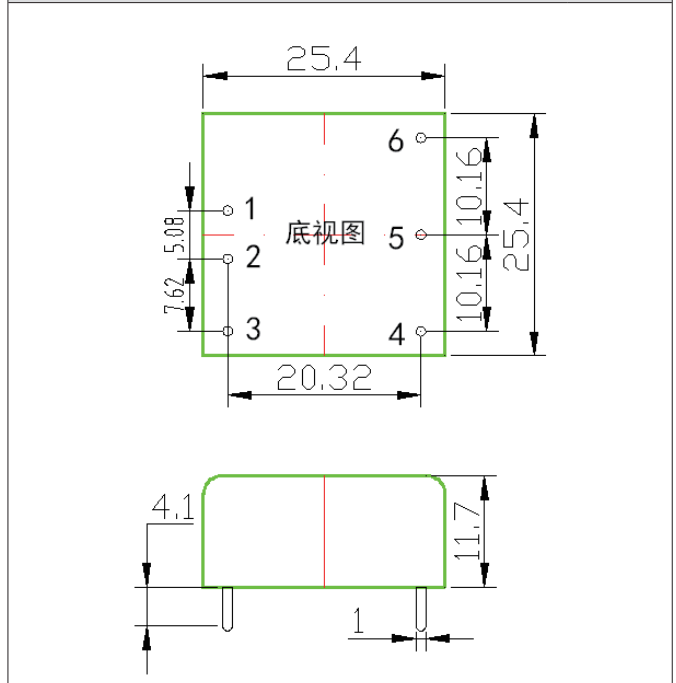

■ 端子功能定义

端子	单路输出	双路输出
1	+Vin	+Vin
2	-Vin	-Vin
3	CTL	CTL
4	-Vo	-Vo
5	NC	COM
6	+Vo	+Vo

注: 6W系列无CTL功能端子